


**YOUR SAFETY IS OUR
PRIORITY!**

**NO MORE NEED TO CHOOSE BETWEEN
PERFORMANCE & SAFETY**

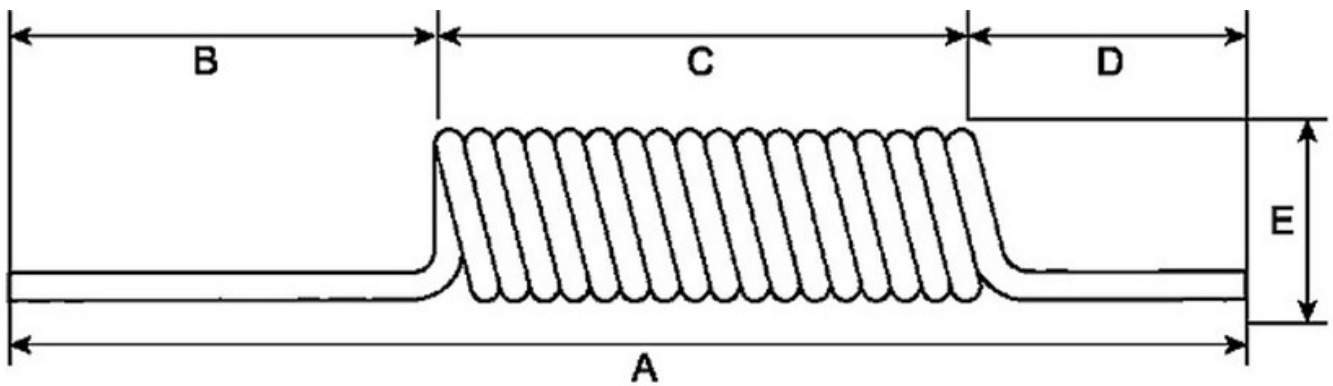

Part 199585820

No. Spiral Non-Braided PUR Hose

[Sales](#) [PDF](#) [Inquiry List](#)

Category title

2 meters

Hose type

Spiral non-braided

Material hose

PUR

Max working pressure (bar)

10 bar (145 PSI)

ID x OD (mm)

5.0 x 8.0 mm

Hose variants

Standard

Hose colour

Blue

Measure A (mm)

740 mm

Measure B (mm)

500 mm

Measure C (mm)

140 mm

Measure D (mm)

100 mm

Measure E (mm)

42 mm

Temperature range hose

-30 – +60 °C

Max working pressure (range)

10 bar

**YOUR SAFETY IS OUR
PRIORITY!**

**NO MORE NEED TO CHOOSE BETWEEN
PERFORMANCE & SAFETY**


Spiral Non-Braided PUR Hose

Stream-line

CEJN spiral hose is an excellent choice for applications that call for hose to have excellent recoil ability and crimp resistance. It offers high tensile and tear strength and resistance to impacts. The hose is abrasion resistant and is suitable for applications in a wide temperature range.

YOUR SAFETY IS OUR PRIORITY!

NO MORE NEED TO CHOOSE BETWEEN PERFORMANCE & SAFETY

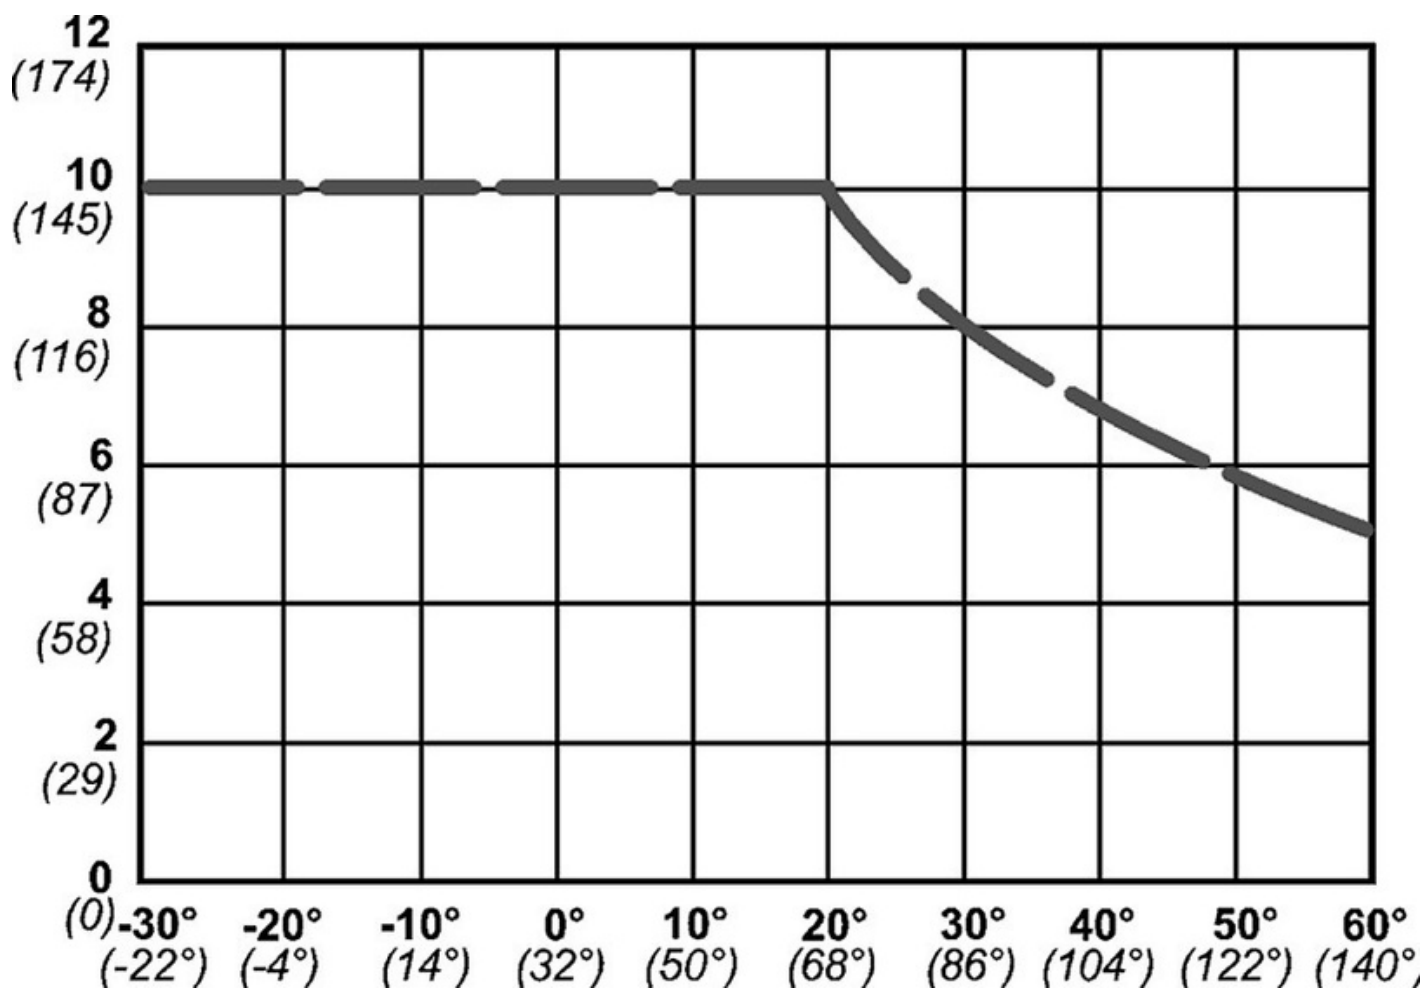

Working Pressure

x: Chart temperature C (F)

y: Chart pressure bar (PSI)

Check with an authorized CEJN distributor for availability and prices. All measurements are in mm. Other connections and sealing material on request. Some part numbers may be subject to minimum order quantities. CEJN reserves the right to make changes without further notification. Thread connections are listed according to ISO standards, unless stated otherwise.